


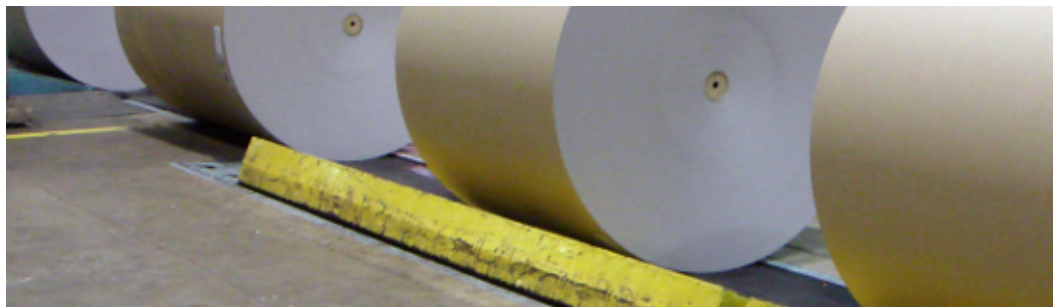

## Technical Data Sheet

### IMPULSE 75

| Parameters       | Standard  | Unit             | Measurement |
|------------------|-----------|------------------|-------------|
| Substance        | ISO 536   | g/m <sup>2</sup> | 77,5 +/- 3% |
| Thickness        | ISO 534   | µm               | 102 +/- 2   |
| Bulk             | ISO 534   |                  | 1,33        |
| Moisture Content | ISO 287   | %                | 4,2 +/- 0,5 |
| Roughness        | ISO 8791  | Bendtsen ml/min  | 200 +/- 50  |
| Whiteness        | ISO 11475 | CIE              | 161 +/- 3   |
| Opacity          | ISO 2471  | %                | 90 +/- 4    |
| Stiffness MD     | ISO 2493  | m/N              | 85 +/- 10   |
| Stiffness CD     | ISO 2493  | m/N              | 40 +/- 5    |

#### Production sites:

The production mills operate in compliance with the following standards



#### Special Attributes:



#### References:

Product is made taking into account requirements of DIN EN 12281  
Product made from ECF Pulp  
ISO 18001 - OHSAS Health & Safety

The data presented can be changed without notice.

International Paper EMEA  
Chaussée de la Hulpe 166  
1170 Brussels, Belgium  
Tel.: +32 2 774 1211  
Fax: +32 2 774 1299  
Extract date: 18.01.2017